

TANDEM



DIMENSIONS			
LENGTH	36' or 40'	KING PIN	24" Standard, 18" Optional
EXTERIOR WIDTH	102"	OVERALL HEIGHT	134" w/ 74" Wall, 137" w/ 77" Wall
INTERIOR WIDTH	98"	SLOPES	Minimum 30°
WALL HEIGHT	74" Standard, 77" Optional		

TRI-AXLE



DIMENSIONS			
LENGTH	45' - 2 Hopper Standard; 45' - 3 Hopper Optional	KING PIN	2 Hopper - 15" Standard; 3 Hopper - 18" Standard
EXTERIOR WIDTH	102"	OVERALL HEIGHT	140" w/ 80" Wall, 144" w/ 84" Wall
INTERIOR WIDTH	98"	SLOPES	Minimum 29.5°
WALL HEIGHT	2 Hopper - 80" Standard w/ 84" Option; 3 Hopper - 80" Only		

SUPER-B



DIMENSIONS			
LENGTH	Lead 28'6", Pull 30' Standard; Lead 28'6", Pull 28'6" Option	KING PIN	Lead - 30" Standard, 24" Option; Pull - 15" Standard
EXTERIOR WIDTH	102"	OVERALL HEIGHT	139" w/ 79" Wall; 142" w/ 82" Wall; 145" w/ 85" Wall
INTERIOR WIDTH	98"	SLOPES	Minimum 30°
WALL HEIGHT	79" Standard; 82" or 85" Optional		

BODY STRUCTURE

PRESTIGE


COUPLER	Holland Fifth Wheel Standard; Other Options Available
HOPPER CHUTES	Standard Opening Size - 24" Long × 16" Wide; Roadside Opener Standard; 23 ¼" Clearance (w/ 11Rx24.5 Rubber); Other Options Available
HOPPERS	14 Gauge Steel; Overlapped Corners; Two Rows of Stiffeners on All Sides; Full Height Steel Divider Wall between Hoppers; Other Options Available
LANDING GEAR	Holland Mark V, Two Speed
LIGHTING	Seven Wire Connector at Front; Truck-Lite LED Lighting Standard; Lifetime Warranty Lamps; Truck-Lite Wiring Harness; Other Options Available
MUD FLAPS	½" Rubber Anti-Sail Rear Flaps Standard; Other Options Available
PAINT	All Steel Components, Coupler Frame and Suspension Frame. Three-Stage Paint Process Consisting of a Coating of Zinc, Urethane Primer and Top Coat.
SIDE WALLS	Corrugated 16 Gauge Steel Side Walls w/ 14 Gauge in High Stress Areas; Other Options Available
SLOPES	Aluminum Slope Sheets - 1/16" Thickness, Available in Black, White or Unpainted; No Less than 29.5°
TARPS/TARP SUPPORTS	Michel's Roll Tarp, Reinforced over Roof Bows; Fiberglass Ridge Pole; Aluminum Roof Bows; Aluminum End Caps; Remote Openers; Other Options Available

RUNNING GEAR


AXLES	Hendrickson INTRAAX 5/16" Wall, 5 ¾" Round, 77 ½" Track, HN Spindle; Other Options Available
BRAKE SYSTEM	Air Drum Brake Standard; HXS-H23 Extended Service Linings Standard; Haldex 30/30 Gold Seal; Haldex S-ABA Slack 5 ½"; 28 Spline Standard; Meritor Wabco ABS Equipped; Other Options Available
FENDERS	Lode King Aluminum Flat Fenders; Other Options Available
HUBS	10 Stud HP Cast Hub/Cast Drum Standard; Other Options Available
SUSPENSION	Hendrickson INTRAAX AANT23K LDA Air Ride Standard; Air Gauge Mounted in an Aluminum Box c/w Window and Light; Other Options Available
TIRES	Michelin/BF Goodrich Standard; Other Options Available
WHEEL SEALS	National
WHEELS	22.5" Standard; Other Options Available

—
REFINED PERFORMANCE.


36' TANDEM

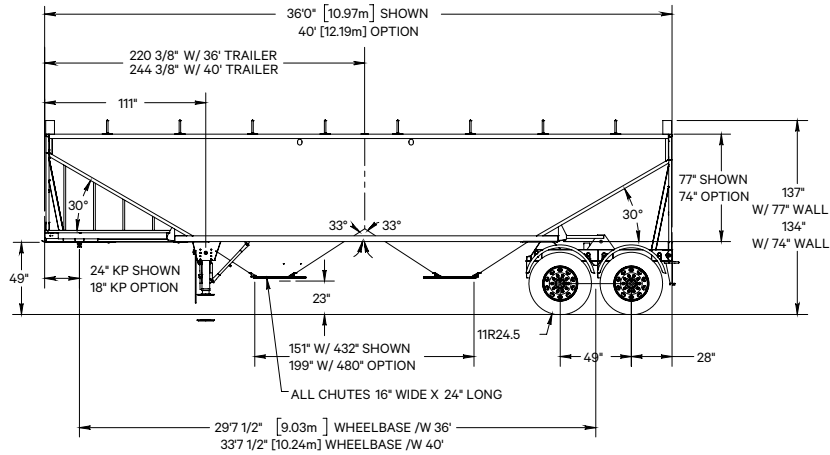


40' TANDEM

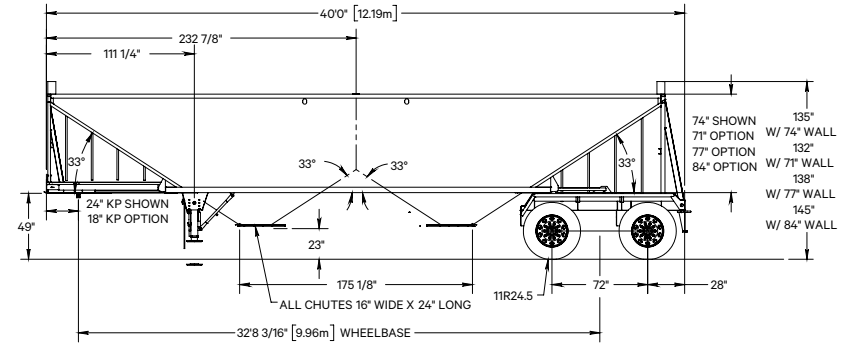


45' TRI-AXLE 2-HOPPER

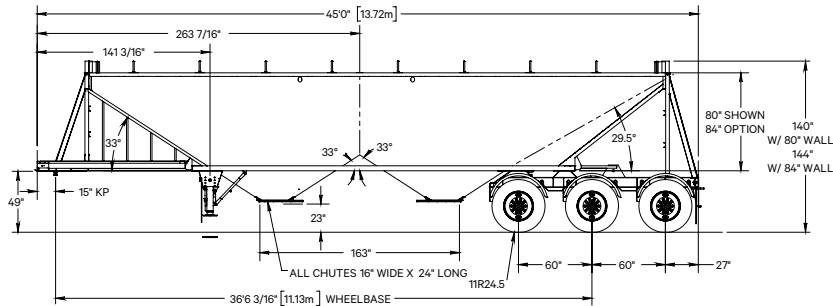

45' TRI-AXLE 3-HOPPER

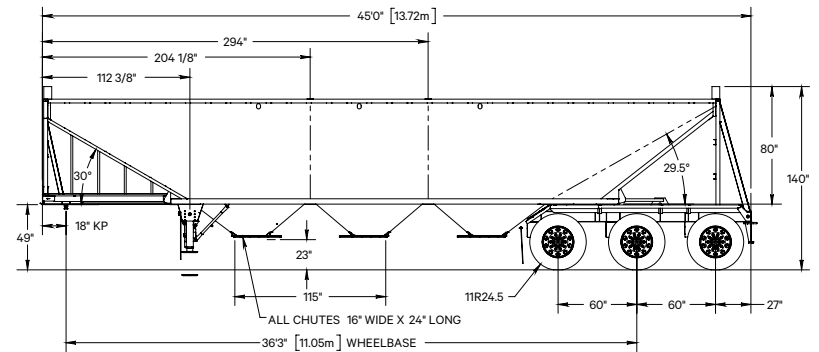

28'6" LEAD & 30' PULL

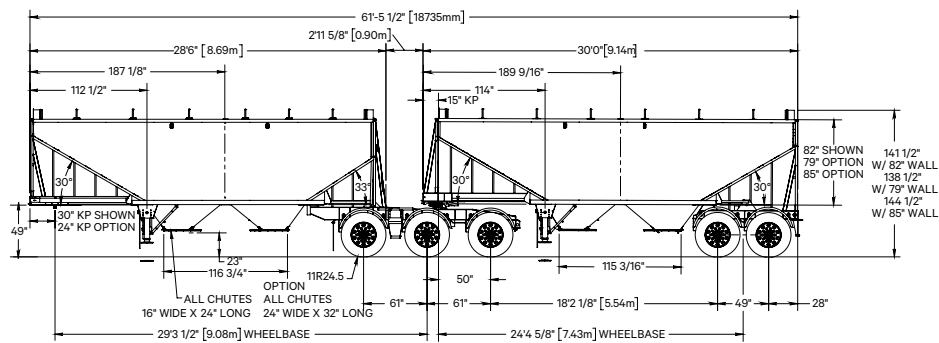

28'6" LEAD & 28'6" PULL

