

LODE  KING

www.lodeking.com



AHE LODE-EQUALIZER

GRAIN TRAILER

SPECIFICATIONS

BODY STRUCTURE

- LENGTH** Lead 28'6", Pull 30'
- WIDTH** 102"
- WALL HEIGHT** 83"
- KING PIN** Lead 30" (option 24"), Pull 15"
- WALLS** Pre-painted aluminum
- SLOPES** Pre-painted aluminum
- HOPPERS** Pre-painted aluminum. Centre full height aluminum divider between hoppers
- HOPPER DOORS** 28" wide x 20" long with chain and sprocket drive, removable crank and multiple position locking mechanism
- LADDER** Aluminum, front and rear with interior access steps
- FIFTH WHEEL** Holland FW3500 Kompensator
- LANDING GEAR** Holland Mark V, 2 speed with attached handle
- FENDERS** Smooth aluminum fenders at front of Lead and Pull and at rear of Pull, checker plate aluminum fender with splash guard at tridem
- MUDFLAPS** Heavy duty, black rubber, anti-sail
- TARP** Michel's or Shurlok, with open and closed handle lock positions
- TARP SUPPORTS** Aluminum end caps and aluminum roof bows
- LIGHTING** SAE J560 7-pin plug at front, sealed lights, Lode-King sealed wiring system
- FINISH** Steel frame is fully grit blasted, pure zinc coating on exterior, urethane primer, DuPont Imron 5000 top coat, colour per customer specs

RUNNING GEAR


- SUSPENSION** Intraax AANT23K air ride
- AXLES** Hendrickson 5.75" round, 77.5" track
- ABS BRAKES** Meritor Wabco
- HUBS** 10 stud, hub pilot mount, cast or lighter weight options
- DRUMS** Outboard, cast or lighter weight options
- BRAKES** 16½" x 7" quick change
- BRAKE LININGS** CM18
- WHEELS** Steel disc painted white or powder coated silver or aluminum
- TIRES** Wide range of Bridgestone and Michelin products available

OPTIONS

- 4 in a row full width mudflaps ahead of landing gear
- 2 mudflaps ahead of second hopper
- Brake pot belting ahead of suspension
- Load gauge enclosure with internal light and a sealed window in the door
- Air coupling in load gauge enclosure
- LED lights
- Implement style loading lights
- Implement style unloading light
- Chute opening from both sides
- Sidewall vent in each hopper
- Aluminum fill plate in bumper with Lode-King logo
- Tow hooks at rear of Pull
- Placard holders
- Hubodometer

TRAILER VOLUME (CUBIC FT.)

Wall Height	Lead 28'6"		Pull 30'		Total	
	WATER LEVEL	HEAPED	WATER LEVEL	HEAPED	WATER LEVEL	HEAPED
83"	1324	1425	1372	1480	2696	2905

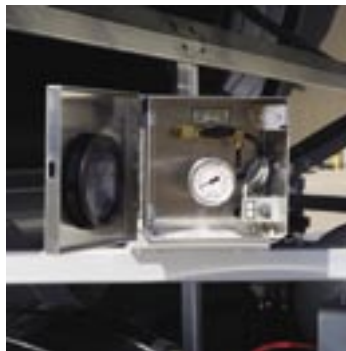

LODEKING INDUSTRIES

A Division of Triple E Canada Ltd.

Box 1146, 135 Canada Street
 Winkler, MB Canada R6W 4B2
 T (204) 325-4345 F (204) 325-5369
 www.lodeking.com



Product improvement is an ongoing process at Lode-King Industries. Thus we reserve the right to change any specifications or components on any or all products without prior notice; errors or omissions excepted. Lode-King Industries is under no obligation to undertake modifications to units manufactured prior to changes in specifications. Printed in Canada.

Distributed By: